


PROFILI - *PROFILES*

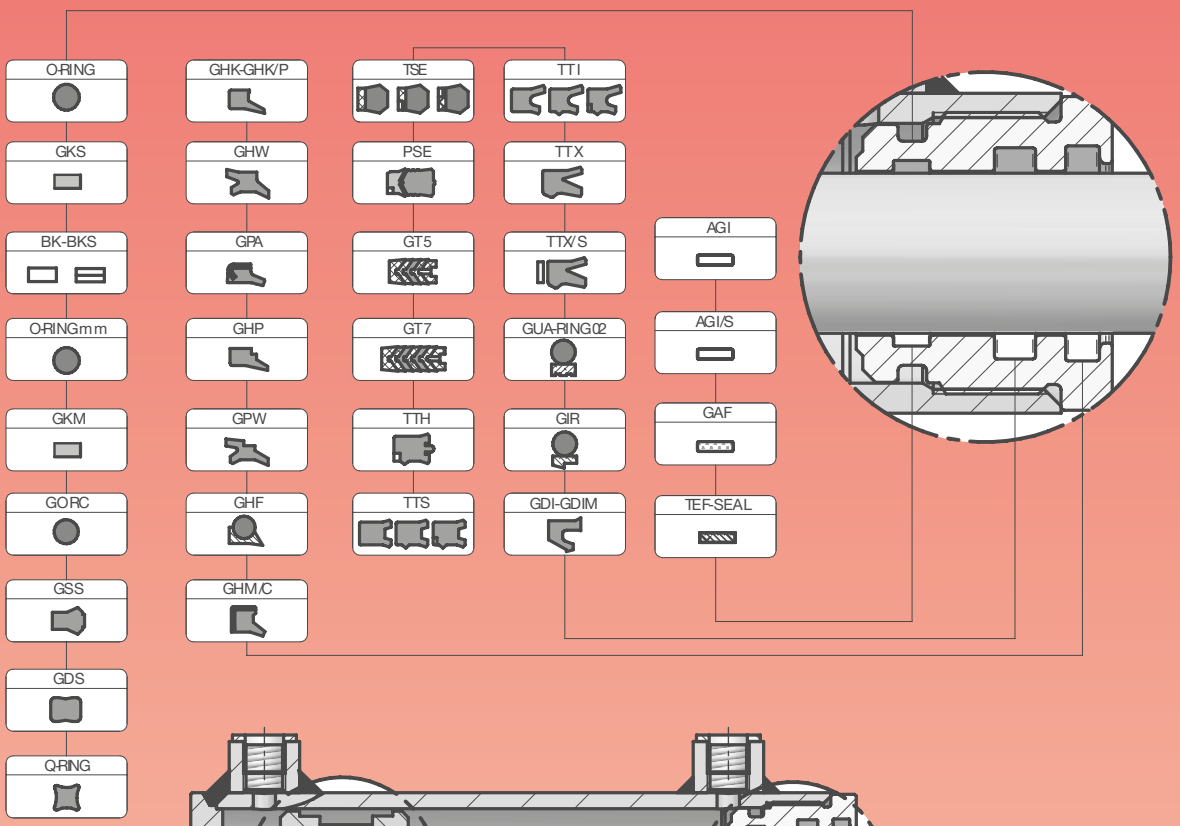

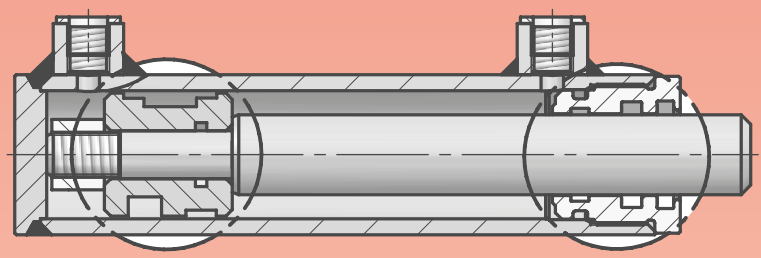

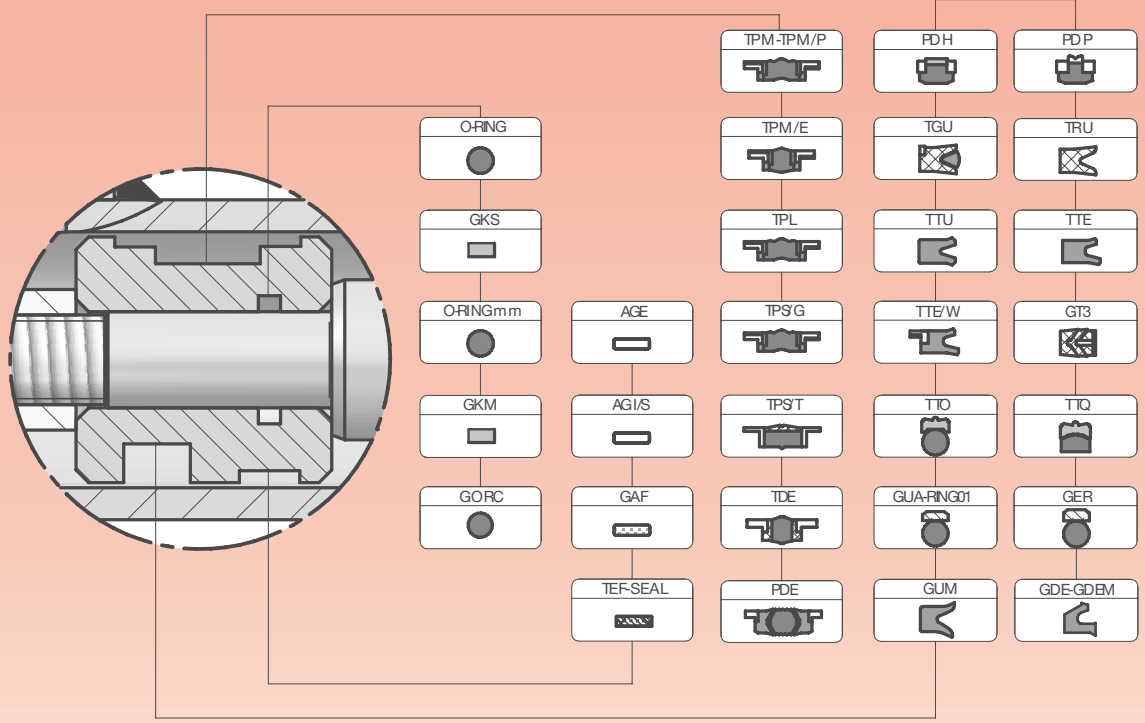

ALTRE GUARNIZIONI SONO FORNIBILI A RICHIESTA. CONTATTATE I NOSTRI UFFICI!!!!

OTHER SEALS ARE AVAILABLE ON REQUEST. PLEASE CONTACT US !!!

COMPATIBILITÀ MATERIALI E FLUIDI
MATERIALS AND FLUID COMPATIBILITY

		NBR	HNBR	FKM	Polyurethane PB501	Polyurethane PN522	PA66	POM	PTFE
	Temperature Range °C	+110	+130	+200	+100	+110	+180	+130	+260
		-30	-30	-20	-35	-45	-20	-40	-200
Mineral Oil based Fluids	*Motor Oils*	●	●	●	◇	◇	●	●	●
	Automatic transmission Fluids	●	●	●	●	●	●	●	●
	Family H hydraulic oils (HL, HM, HV)	●	●	●	●	●	●	●	●
Greases	*Mineral Oil based Greases*	●	●	●	●	●	●	●	●
	Silicone based Greases	●	●	●	●	●	●	●	●
Fuels	*Diesel Fuel*	◇	◇	●	◇	◇	●	●	●
	Normal Grade Fuel	◇	◇	●	◇	◇	●	●	●
	Premium Grade Fuel	◇	◇	●	◇	◇	●	●	●
Fire Resistant Fluids	*HFA Fluids oil in water*	●	●	▲	◇	◇	◇	●	●
	HFB Fluids water in oil	▲	▲	▲	◇	◇	◇	●	●
	HFC Fluids water- glycol	●	●	●	▲	▲	◇	●	●
	HFDR Fluids Phosfate Esters	▲	▲	◇	▲	▲	●	●	●
	HFDU Fluids High Performance Bio Oil	●	●	●	▲	▲	●	●	●
Bio Based Hydraulic Oils	*HETG Vegetable Oil based Hydraulic Fluids*	●	●	●	●	●	●	●	●
	HEES Synthetic ester based Hydraulic Fluids	●	●	●	●	●	●	●	●
	HEPG Synthetic Polyglycol based Hydraulic Fluids	●	●	●	●	●	●	●	●
Other Fluids	*Water*	●	●	●	◇	◇	●	●	●
	Air	●	●	●	●	●	●	●	●
	Brake Fluid	▲	▲	▲	▲	▲	●	●	●

● COMPATIBILE *SUITABLE*
◇ LIMITATO *LIMITED APPLICATION*
▲ NON COMPATIBILE *NOT SUITABLE*

Le informazioni in tabella sono generali e variabili in relazione alle temperature di esercizio.
Information contained in this table is general and variable depending on working temperatures.

L'azienda si riserva il diritto di apportare modifiche al prodotto senza preavviso alla clientela.
The company reserves the right to modify the product at any time without prior notice.